


CONCRETE FLOOR SLAB OR BUILDING STRIP FOUNDATION

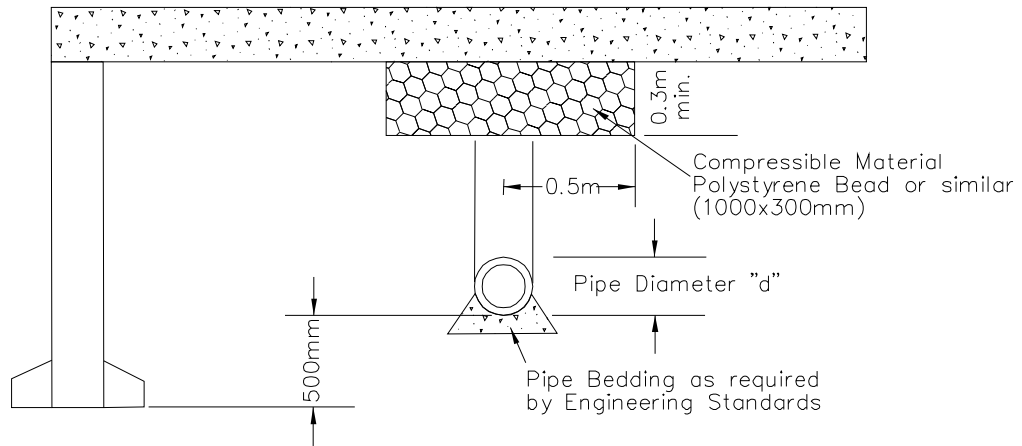

Trench backfill as specified by slab designer.
Note material is not to be bound with cement
or lime or other binding agent.

Refer Policy

- 6.2 Depending on soil conditions a protective skirt wall may be required to be installed to prevent migration of material into trench area. This would be the case particularly with the build close to option where the dwelling runs substantially the full wall length along the pipeline.
- 6.3 Foundation piles must be taken at least 500mm below estimated invert of the pipeline.
- 6.4 Foundation piles must be drilled.



Head Office: 50 Centreway Road, Orewa
Private Bag 500, Orewa, 1461, New Zealand
Tel: 0800 4265169, Fax (09) 4267280
Email: info@rodney.govt.nz

STANDARD DETAIL:

**BUILD OVER -
PILE AND FLOOR SLAB
MINIMUM REQUIREMENTS**

Copyright on this Drawing is Reserved
DATE: Aug 2009
NOT TO SCALE

RDC NO: SHEET NO: REV:
18000 P2 1