



TYPICAL ELEVATION  
NO RAMP RISER  
N.T.S.

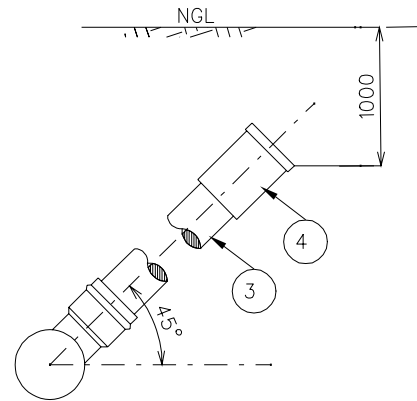

TYPICAL ELEVATION  
RAMP RISER  
N.T.S.

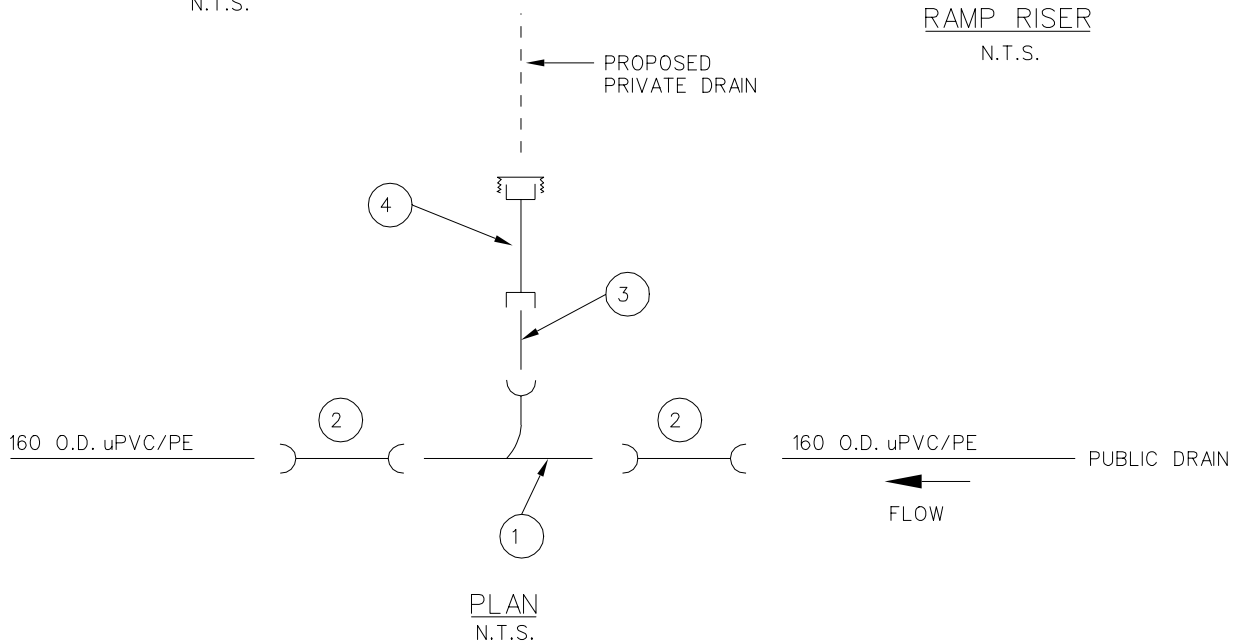

PLAN  
N.T.S.

SERVICE CONNECTION FITTINGS SCHEDULE			
FITTING	DIA (mm)	DESCRIPTION	QTY.
①	160 O.D.x110 I.D.	TYPE "A" uPVC 45 WYE JUNCTION	1
②	160 I.D.	uPVC SOCKETTED SLIP COUPLING, SN16 TO AS/NZS 1260, "M-RING" RUBBER RING AT BOTH ENDS, MINIMUM LENGTH 200mm, NO CENTRE REGISTER	2
③	110 O.D.	uPVC SN16 PLAIN ENDED PIPE 300mm LONG (NO RAMP RISER) OR TO SUIT (RAMP RISER REQUIRED)	1
④	110 I.D.	uPVC SN16 SCREW CAP FITTING (INCLUDING SCREW CAP), THREADED ON OUTSIDE FACE FOR SCREW CAP, FITTING ENDS 110mm ID SUITABLE FOR JOINTING WITH SOLVENT CEMENT TO 110 OD uPVC PIPE. ONLY TWO PIECE FITTINGS (i.e. INCLUDING CAP) ARE APPROVED.	1



Head Office: 50 Centreway Road, Orewa  
Private Bag 500, Orewa, 1461, New Zealand  
Tel: 0800 4265169, Fax (09) 4267280  
Email: info@rodney.govt.nz

26 February 2009

STANDARD DETAIL:

**WASTEWATER SERVICE  
CONNECTION DETAILS  
160MM O.D. UPVC OR  
PE PUBLIC DRAIN**

Copyright on this Drawing is Reserved

DATE: June 2005

NOT TO SCALE

RDC NO:

SHEET NO:

REV:

18000

5.6